




"THE STANDARD OF EXCELLENCE IN THE INDUSTRY"

Instructions for the Third Hand Tool

For the Third Hand Tool, the top finger (Tab) is longer than the bottom finger (Hook). (See drawing below.)

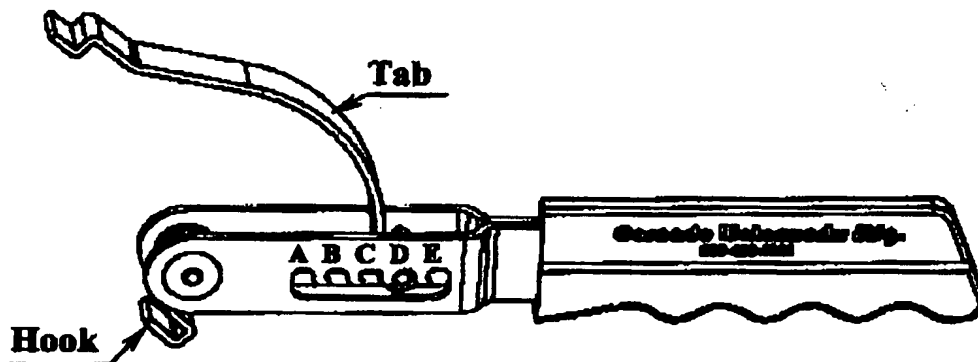


- ◆ Insert the Tab into the Slot in the Repair Clamp's Receiver Bar Slot.
- ◆ Place the Hook on the outside edge of the Stud Bar.
- ◆ Adjust the Tab's pin to be in Slot "C".
- ◆ Pull down the Third Hand Tool. The Third Hand should lock into place.

If the Third Hand is too loose, open & move the Tab's pin back 1 notch toward "E", try again.

If the Third Hand is too tight, open & move the Tab's pin forward 1 notch toward "A", try again.

- ◆ Tighten Nuts on Repair Clamp as instructed.
- ◆ Lift the handle to Unclamp &
Remove The Third Hand Tool.

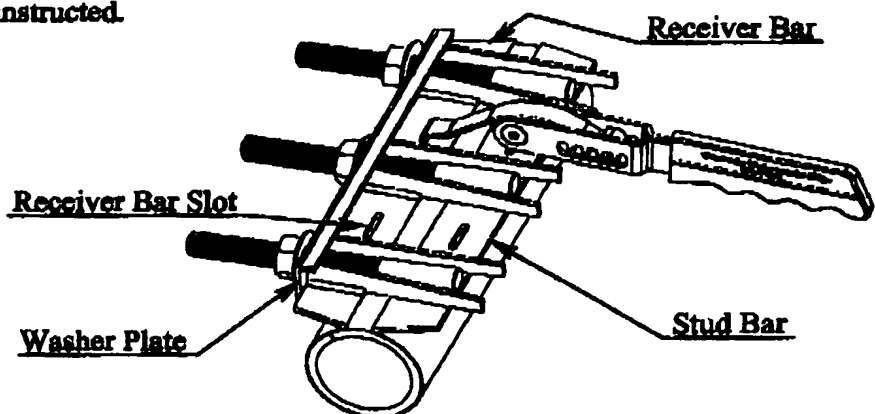

BEST AVAILABLE COPY

